

NITRON® Cold Draft



NITRON

(Model shown w/ lit door and gas module)
Dimensions: 9.8" W x 29.8" D x 34" H
(24.9cm W x 75.7cm D x 86.3cm H)



NITRON

(Model shown w/ unlit door)
Dimensions: 9.8" W x 29.8" D x 34" H
(24.9cm W x 75.7cm D x 86.3cm H)

Features

Countertop Cold Draft Dispenser

- Model 51600.6028 includes Gas Module specifically designed for Nitron Cold Draft dispensers, eliminating the need for other external gas sources
- 11" x 6.5" graphic panel on the LED-lighted door can easily be changed - without tools- to promote unique brands or beverage offerings
- Serve two different coffees or teas, one Nitro and one Still, using 1- gallon concentrate ball-valve BIBs or BUNN refillable containers
- Patented BUNN gas infusion technology can produce up to 3 minutes of cascading micro-bubbles
- Patented High Intensity® mixing chamber assures a perfectly blended finished beverage, from cup to cup
- Mounted on standard 3/8"-16 UNC threads, chrome plated brass tap handles are interchangeable with custom handles for a more personalized look
- Automatic water bath fill maintains water bath level for optimal cold beverage capacity
- At a rate of one 16oz drink per minute, can dispense 60 drinks before exceeding 41°F (using 75°F incoming water)
- Refrigerated product cabinet protects flavor integrity and product life
- Large dispense area accommodates taller cups and carafes up to 8.76"
- Service-friendly design makes set-up and maintenance simple

Related Products

Easy Clear® EQHP-10

Product No. : 39000.0004



CONTAINER ASSY, REFILLABLE

Product No. : 39302.0000

Dimensions:
12 7/16" H x 2 1/2" W x 3" D
(31.6 cm H x 6.35 cm W x 7.62 cm D)



NITRON® Gas Module w-Relay, 120V

Product No. : 55600.6005



Easy Clear® EQHP-5C

Product No. : 39000.0014



KIT, PRIMARY N2 REGULATOR

Product No. : 54060.0000



Model

NITRON®

Agency Listing



Dimensions & Specifications



Model	Product #	Volts	Amps	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
NITRON®*	51600.6018	120	6	720	7.5gal/28.3L	5.74/0.16	130/58.9	yes
NITRON®**	51600.6028	120	6	720	7.5gal/28.3L	5.74/0.16	135.2/61.3	yes
NITRON®***	51600.6011	120	6	720	7.5gal/28.3L	5.74/0.16	130/58.9	yes

* Lit Door

** Lit Door and Gas Module included

*** Unlit Door


Capacity: 7.5 gallons per hour before exceeding 41°F (75°F incoming water)

Electrical: Requires 2-wires plus ground service rated 120V, single phase, 60Hz. Brewer is supplied with a cordset and a NEMA 5-15P plug. Receptacle is not included (NEMA 5-15P).

Plumbing: 30-90 psi (207-621 kPa). Supplied with 3/8" male flare fitting and garden hose fitting.

N₂ GAS SPECIFICATIONS:

N ₂ GAS INPUT CONNECTION	1/4" Male Flare Bulkhead
MINIMUM N ₂ INLET PRESSURE	120 PSI
MAXIMUM N ₂ INLET PRESSURE	130 PSI
HIGH PRESSURE N ₂ REGULATOR (54060.0000 required for tanks, sold separately)	125 PSI Pressure Output
ICE BANK	8 lbs

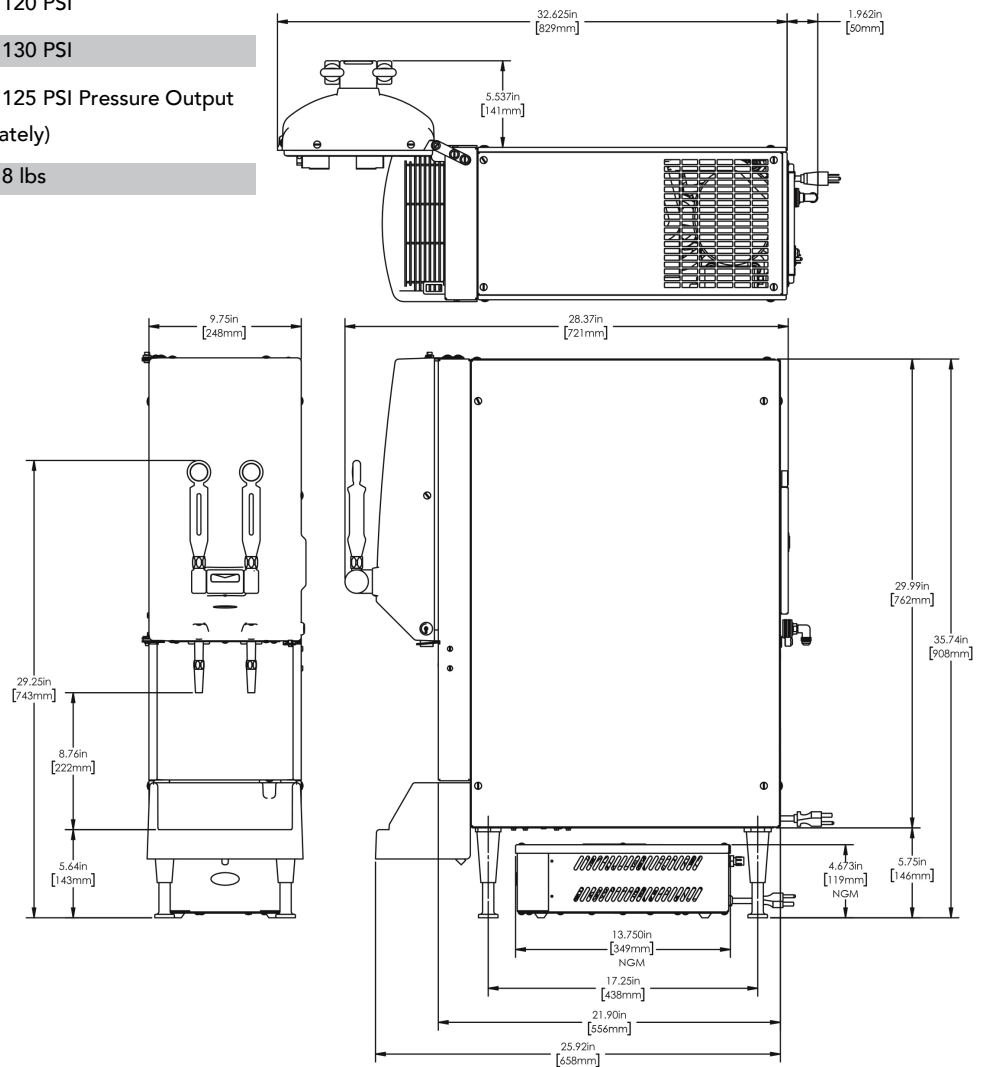

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches and centimeters.

1/16 © Bunn-O-Matic Corporation