

Kegeator / Beer Dispensers - 115V

SKU: 12000-795	16000-220	16000-339
12000-792	12000-794	12000-791



Enjoy a crisp, refreshing pour of your favourite brew served at the ideal temperature.

Built for long-lasting performance and exceptional value, it features a sleek black exterior made of corrosion-resistant vinyl over steel. The interior is fully constructed with durable stainless steel – including the top, walls, floor, and ceiling. Equipped with self-closing, lockable doors and energy-efficient LED lighting.

FEATURES:

• Efficient Cooling Technology:

Utilizes hydrocarbon R290 to deliver optimal cooling performance, maintaining product temperatures at ideal serving levels.

• Durable Construction:

Engineered with premium materials for long-lasting durability and dependable operation.

• Self-Closing Doors with Locks:

Doors close automatically to retain cold air, improve energy efficiency, and enhance security.

• Sleek Design with LED Interior Lighting:

Features a modern black finish with corrosion-resistant vinyl over steel, complemented by bright LED interior lighting.




• Removable Installation Board:

Allows convenient access to the condenser coil for easy cleaning and maintenance.

• Adjustable Shelves:

Offers flexible storage options, helping you organize and maximize interior space efficiently.

Made in China

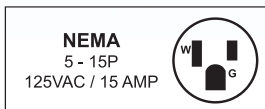

2 YEARS
WARRANTY
PARTS & LABOUR
5 YEARS ONLY
ON COMPRESSOR



12000-795




16000-200/16000-339



12000-792

TECHNICAL SPECIFICATION

SKU	12000-795	16000-200	16000-339	12000-792
Features	24" Wide	49" Wide	59" Wide	61" Wide
Capacity	170L 6.5 cu.ft.	335L 11.8 cu.ft.	546.5L 19.3 cu.ft.	446L 15.8 cu.ft.
Product Capacity	1 Keg (Half-Barrel)	2 Kegs (Half-Barrel)		3 Kegs (Half-Barrel)
Number of Doors	1 Swing Doors	2 Swing Doors		
Number of Shelves	-	4		
Number of Casters	4	-		
Power	1/6 HP	1/5 HP		
Amps	1.92A	3A	2.88A	3A
Electrical	115V / 60Hz / 1Ph			
Temperature Controller	Mechanical			
Temperature Range	5°C - 0.5°C 41°F - 33°F			
Refrigerant	R290			
Interior Dimensions (WDH)	19.5" x 18" x 29" 495 x 457 x 737 mm	36" x 18.5" x 29" 914 x 467 x 737 mm	46" x 22" x 29" 1168 x 559 x 737 mm	48" x 18.5" x 29" 1219 x 467 x 737 mm
Net Dimensions (WDH)	23.5" x 30.8" x 51.5" 597 x 782 x 1308 mm	48.8" x 24.4" x 51.5" 1240 x 620 x 1308 mm	58.8" x 27.7" x 45.5" 1494 x 704 x 1156 mm	60.8" x 24" x 51.5" 1544 x 610 x 1308 mm
Net Weight	132.28 lb. 60 kg.	231.49 lb. 105 kg.	279 lb. 127 kg.	275.58 lb. 125 kg.
Gross Dimensions (WDH)	25.2" x 32" x 48" 640 x 813 x 1219 mm	63" x 27" x 42" 1600 x 686 x 1067 mm	61.3" x 30.5" x 42" 1549 x 775 x 1067 mm	63" x 27" x 42" 1600 x 686 x 1067 mm
Gross Weight	169 lb. 76.7 kg.	319 lb. 114.7 kg.	312 lb. 142 kg.	319 lb. 114.7 kg.
Plug Type	NEMA 5-15P			

Stainless steel top
tray coverMechanical
Temperature Controller

Thermometer



12000-794




12000-791




12000-793

TECHNICAL SPECIFICATION			
SKU	12000-794	12000-791	12000-793
Features	69" Wide	73" Wide	90" Wide
Capacity	659.7L 23.3 cu.ft.	556L 19.6 cu.ft.	916L 32 cu.ft.
Product Capacity	3 Kegs (Half-Barrel)	3 Kegs (Half-Barrel)	5 Kegs (Half-Barrel)
Number of Doors	2 Swing Doors	3 Swing Doors	
Number of Shelves	4	6	
Number of Casters	-		
Power	1/5 HP	1/4 HP	
Amps	3.6A	4A	4.7A
Electrical	115V / 60Hz / 1Ph		
Temperature Controller	Mechanical		
Temperature Range	5°C - 0.5°C 41°F - 33°F		
Refrigerant	R290		
Interior Dimensions (WDH)	56.5" x 21.8" x 29" 1435 x 557 x 737 mm	60.2" x 18.5" x 29" 1529 x 467 x 737 mm	77.5" x 21.8" x 29" 1969 x 554 x 737 mm
Net Dimensions (WDH)	69" x 27.8" x 48.4" 1753 x 706 x 1229 mm	72.8" x 24" x 51.5" 1849 x 610 x 1308 mm	90.4" x 27.7" x 48.4" 1849 x 610 x 1308 mm
Net Weight	326 lb. 148 kg.	331 lb. 150 kg.	374 lb. 170 kg.
Gross Dimensions (WDH)	71" x 30" x 41" 1803 x 762 x 1041 mm	75" x 27" x 42" 1905 x 686 x 1067 mm	92" x 31" x 43" 2337 x 787 x 1092 mm
Gross Weight	327 lb. 148.3 kg.	385 lb. 175 kg.	398 lb. 180.5 kg.
Plug Type	NEMA 5-15P		


TECHNICAL DRAWING: 12000-795

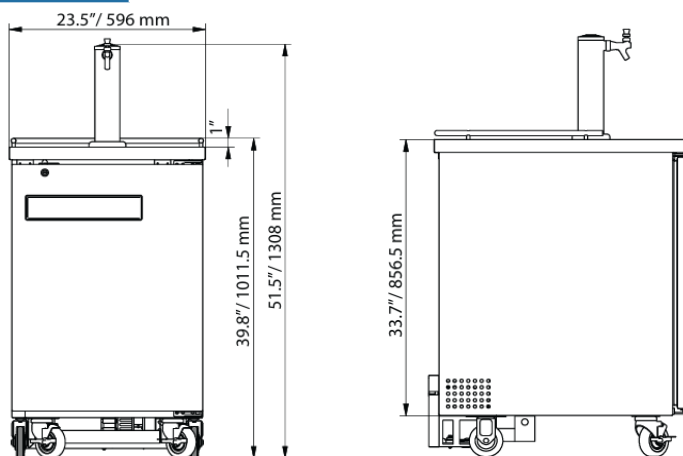


TECHNICAL DRAWING: 16000-200

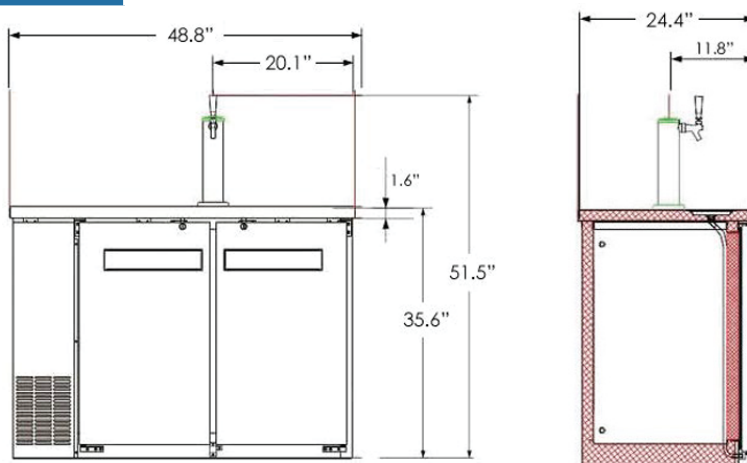



TECHNICAL DRAWING: 16000-339

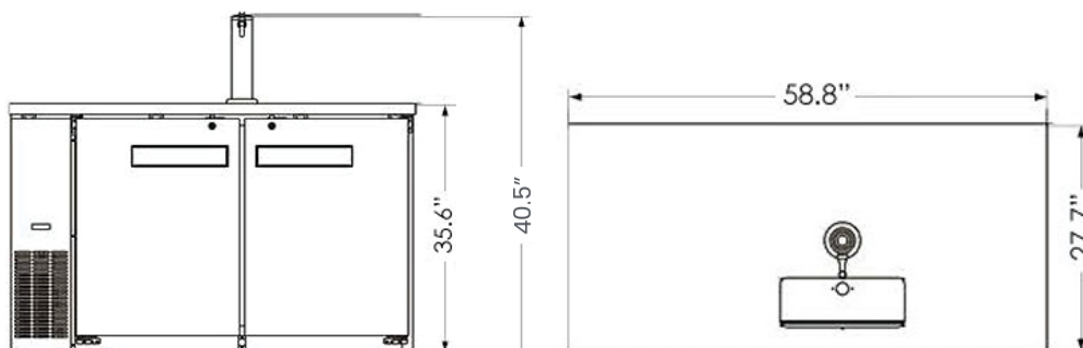


TECHNICAL DRAWING: 12000-792

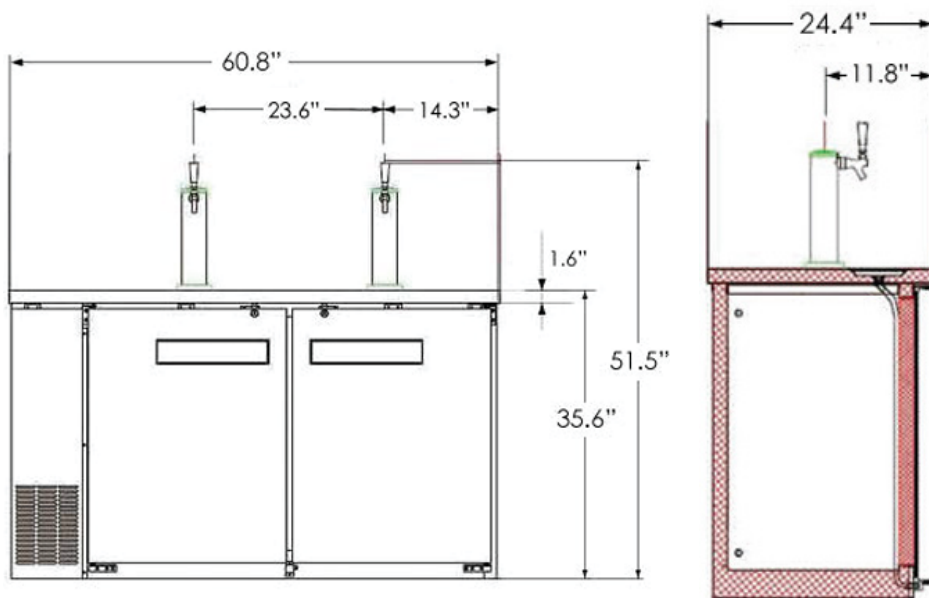

TECHNICAL DRAWING: 12000-794

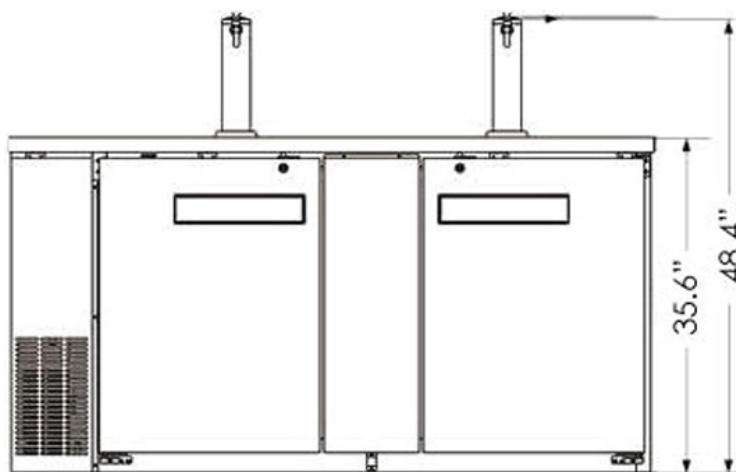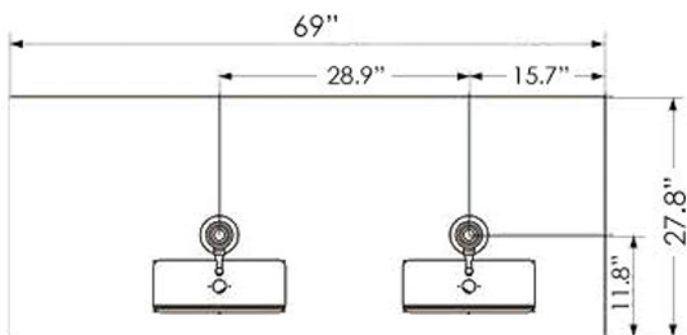

TECHNICAL DRAWING: 12000-791

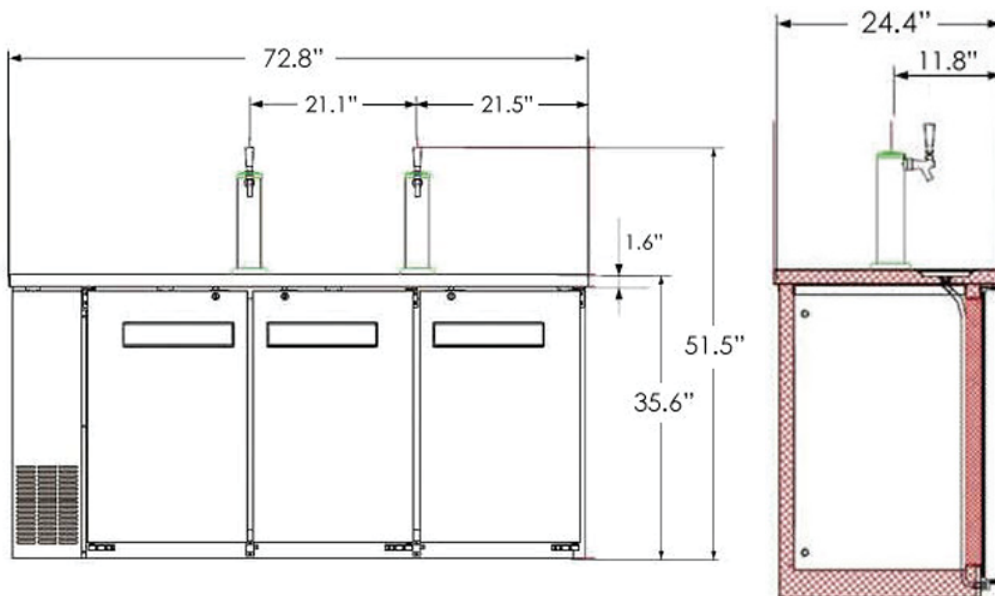

TECHNICAL DRAWING: 12000-793

