

Titan™ Dual Brewer



Model Titan Dual Brewer with 3 gallon TF Servers

(servers sold separately)

Dimensions: 40.02" H x 35.63" W x 21.74" D
(101.7cm H x 90.5cm W x 55.2cm D)

Features

Titan Dual Brewer

High-volume brewing solution that features simple operation, precise extraction control and portable servers

- Brews 34.3 gallons (129.8 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER™ allows automatic programming of pulse routine.
- SplashGard® funnel and funnel locks help improve safety.
- Funnel has 28 ounce (.8 kg) ground coffee capacity and paper filter retainers to eliminate fold-over.
- Titan TF servers are insulated to keep coffee hot for hours.
- Hot water faucet.
- Energy-saver mode reduces tank temperature during idle periods.

Related Products

Easy Clear® EQHP-54

Product No. : 39000.0006



Easy Clear® EQHP-54L

Product No. : 39000.0003

Single/Dual Filter Pack

Product No. : 20111.0000

Packed per case: 250

Dimensions:

20" Base x 8" Sidewall

50.8 cm Base x 20.3 cm Sidewall



Titan TF Server

Product No.: 39400.6000

3 gallon, Mechanical Gauge



Titan Funnel Assy.

Product No.: 40105.7000

(boxed)



Model

Titan Dual

Agency Listing



Dimensions & Specifications



Model	Product #	Volts	Amps	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Funnel Locks	Cord Attached
Titan Dual	39200.6000	120/208	33.4	12000	34.3 gal/129.8 L	27 /.76	148 /67.1	Yes	No
		(3-phase)							
		*120/208	40.1	8200	22.9 gal/86.7 L	27 /.76	148 / 67.1	Yes	No
		(single-phase)							
Titan Dual	39200.6001	120/240	28.9	12000	34.3 gal/129.8 L	27 /.76	148 /67.1	Yes	No
		(3-phase)							
		*120/240	35	8200	22.9 gal/86.7 L	27 /.76	148 / 67.1	Yes	No
		(single-phase)							


Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

*Brewer can easily be rewired in the field for single-phase operation.

Electrical: Brewer is 4-wires plus ground service rated 120/208V, 3-phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting.

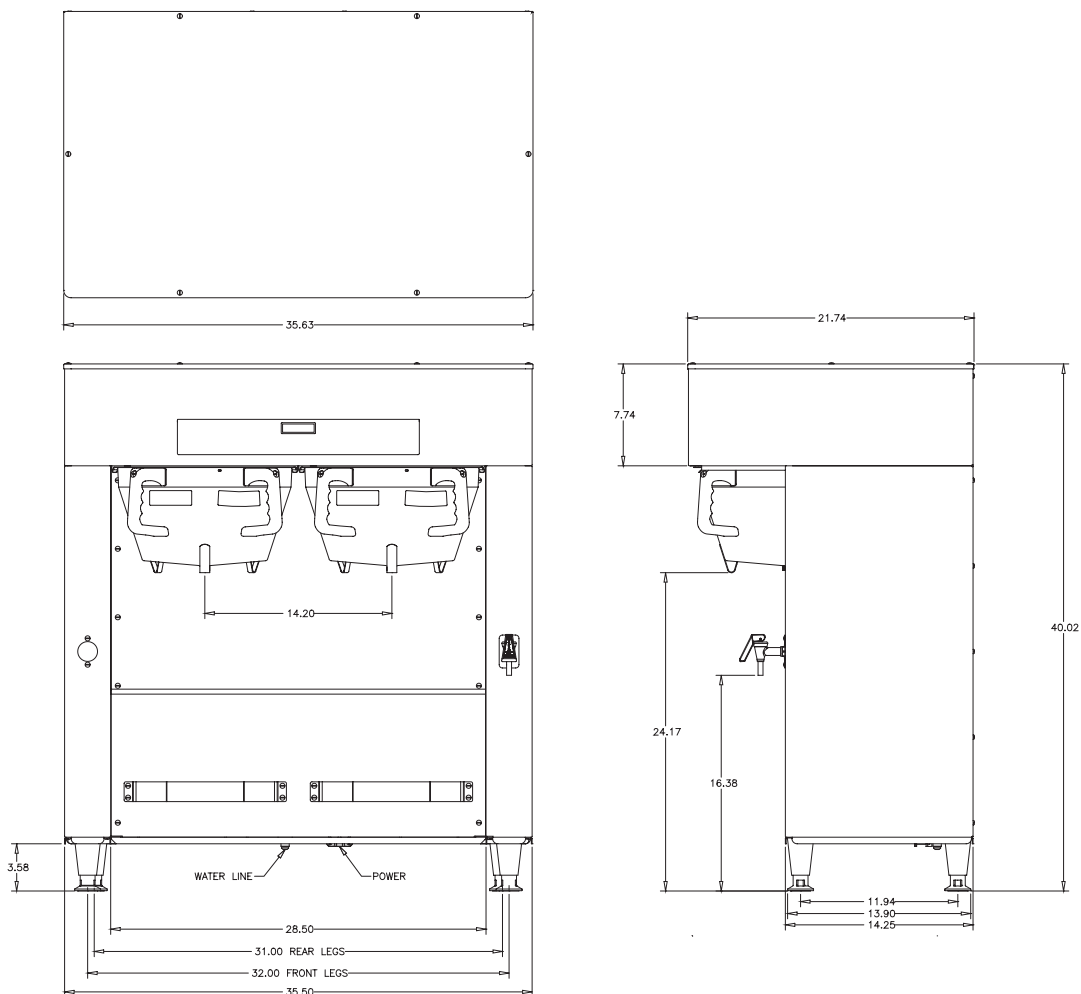

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.