

Glass Door Merchandiser Refrigerators – Black

SKU: 18000-487

18000-489

18000-490

18000-491

12000-1128

18000-492

28" | 12000-128



22" | 18000-490



53" | 18000-487



78" | 18000-492



26" | 18000-491



53" | 18000-489



Present food merchandise attractively and boost impulse purchases with Zanduco glass door display refrigerators.

The clear glass doors improve product visibility and capture customer attention. Ideal for supermarkets, cafes, and delis. Zanduco refrigerators combine generous storage capacity with a sleek, modern design; enhancing both the visual appeal and functionality of your business.

Made in China

FEATURES:

- **Spacious Interior with Adjustable Shelves**

Large cabinet with multiple adjustable shelves to maximize storage and optimize kitchen space.

- **Efficient, Eco-Friendly Refrigeration**

Uses environmentally safe R290 refrigerant to maintain safe frozen temperatures. The bottom-mounted compressor improves energy efficiency and raises the bottom shelf for easier loading and unloading.

- **Digital Temperature Control**

Digital controller with clear LCD display allows easy temperature adjustment and monitoring.

- **Automatic Defrost System**

Auto-defrost function prevents ice buildup, saving time and reducing maintenance.



NEMA
5 - 20P
125VAC / 20 AMP



NEMA
5 - 15P
125VAC / 15 AMP



2 YEARS
WARRANTY
PARTS & LABOUR

5 YEARS ONLY
ON COMPRESSOR


TECHNICAL SPECIFICATION			
SKU	18000-490	18000-189	18000-487
Features	22" Wide	53" Wide	53" Wide
Capacity	9.1 cu.ft. 257L	45 cu.ft. 1274L	
Number of Doors	1	2	
Type of Doors	Swing Door - Glass Door	Sliding Doors - Glass Doors	Swing Doors - Glass Doors
Self-Closing Doors	YES		
Interior/Exterior Material	Stainless Steel, Aluminum Black		
Number of Shelves	4	8	
Shelf Capacity (kg./pc.)	55.1 lb. 25 kg.	90 lb. 41 kg.	
Shelf Material	Plastic Coated		
Number of Casters	NO		4
Power	1/5 HP	1/4 HP	
Amps	2.9A	4.3A	
Electrical	110-120V / 60Hz / 1Ph		
Temperature Controller	Digital		
Temperature Range	0.5°C - 5°C 33°F - 41°F		
Refrigerant	R290		
Insulation Material	Cyclopentane		
Cooling System	Ventilated		
Defrosting	Automatic		
Interior Dimensions (WDH)	18.9" x 18.3" x 46" 480 x 465 x 1168 mm	50" x 28.3" x 62" 1351 x 807 x 2133 mm	
Net Dimensions (WDH)	21.7" x 21.7" x 63" 551 x 551 x 1600 mm	53.2" x 31.8" x 84" 1351 x 807 x 21.33 mm	
Net Weight	161 lb. 73 kg.	441 lb. 200 kg.	
Gross Dimensions (WDH)	24" x 25" x 69" 599 x 630 x 1755 mm	56" x 34" x 85" 1422 x 850 x 2148 mm	
Gross Weight	225 lb. 102 kg.	481 lb. 218 kg.	
Plug Type	NEMA 5-15P		

**This equipment is intended for indoor environment using where ambient temperature do not exceed 26°C(80°F)and 55% relative humidity*


TECHNICAL SPECIFICATION			
SKU	18000-491	12000-128	18000-492
Features	26" Wide	28" Wide	78" Wide
Capacity	14 cu.ft. 396L	23 cu.ft. 651L	53 cu.ft. 150L
Number of Doors	1		3
Type of Doors	Swing Door - Glass Door		
Self-Closing Doors	YES		
Interior/Exterior Material	Stainless Steel, Aluminum Black		
Number of Shelves	4	5	12
Shelf Capacity (kg./pc.)	77 lb. 35 kg.	90 lb. 41 kg.	
Shelf Material	Plastic Coated		
Number of Casters	NO	YES	
Power	1/5 HP		3/4 HP
Amps	2.88A	3A	10.7A
Electrical	110-120V / 60Hz / 1Ph		
Temperature Controller	Digital		
Temperature Range	0.5°C - 5°C 33°F - 41°F		
Refrigerant	R290		
Insulation Material	Cyclopentane		
Cooling System	Ventilated		
Defrosting	Automatic		
Interior Dimensions (WDH)	22.8" x 19.8" x 55" 579 x 503 x 1397 mm	25.2" x 28.3" x 62.3" 640 x 719 x 1582 mm	73.7 x 25.6" x 55.7"
Net Dimensions (WDH)	25.6" x 22.8" x79.4" 650 x 579 x 2017 mm	28.3" x 31.9" x 83.6" 719 x 810 x 2123 mm	78.3" x 29.9" x 84.6" 1988 x 759 x 2150 mm
Net Weight	220 lb. 99.8 kg.	320 lb. 145.2 kg.	615 lb. 279 kg.
Gross Dimensions (WDH)	48" x 40" x 90" 1219 x 1016 x 2286 mm		84" x 36" x 86" 2133 x 914 x 2184 mm
Gross Weight	270 lb. 122 kg.	355 lb. 161 kg.	720 lb. 326 kg.
Plug Type	NEMA 5-15P		NEMA 5-20P

**This equipment is intended for indoor environment using where ambient temperature do not exceed 26°C(80°F)and 55% relative humidity*

TECHNICAL DRAWING

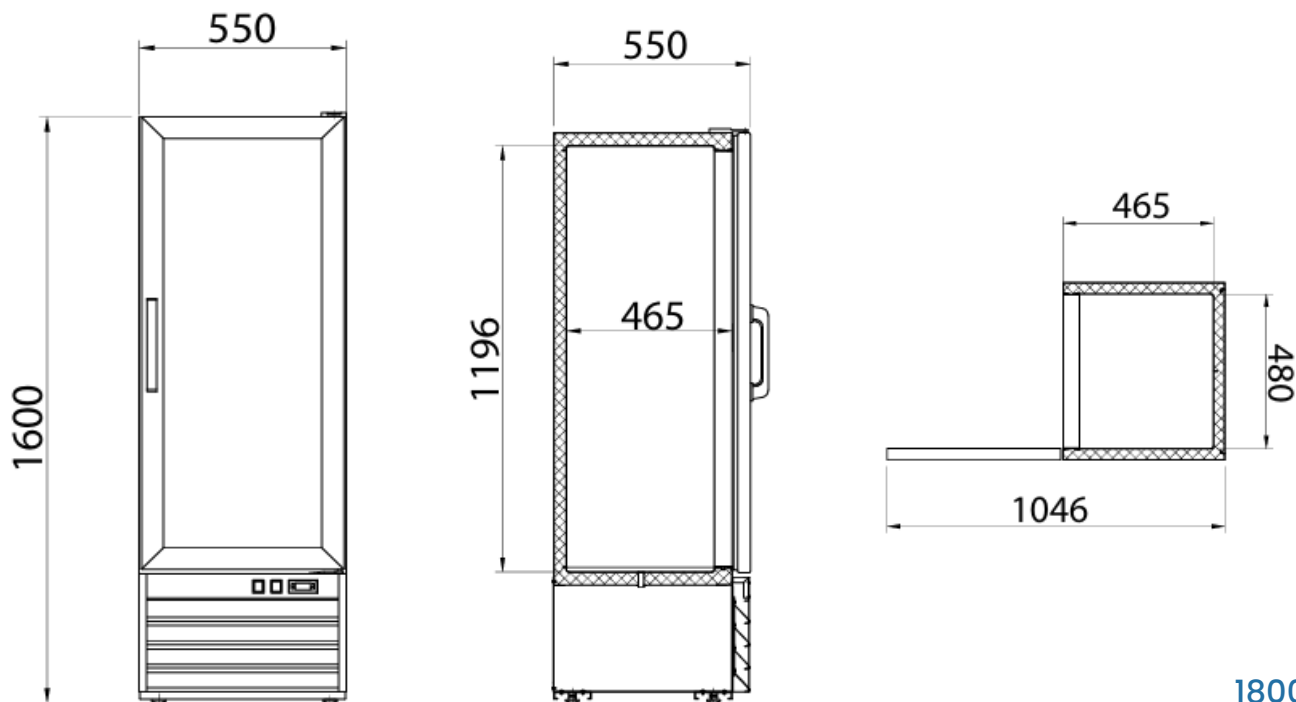


18000-490

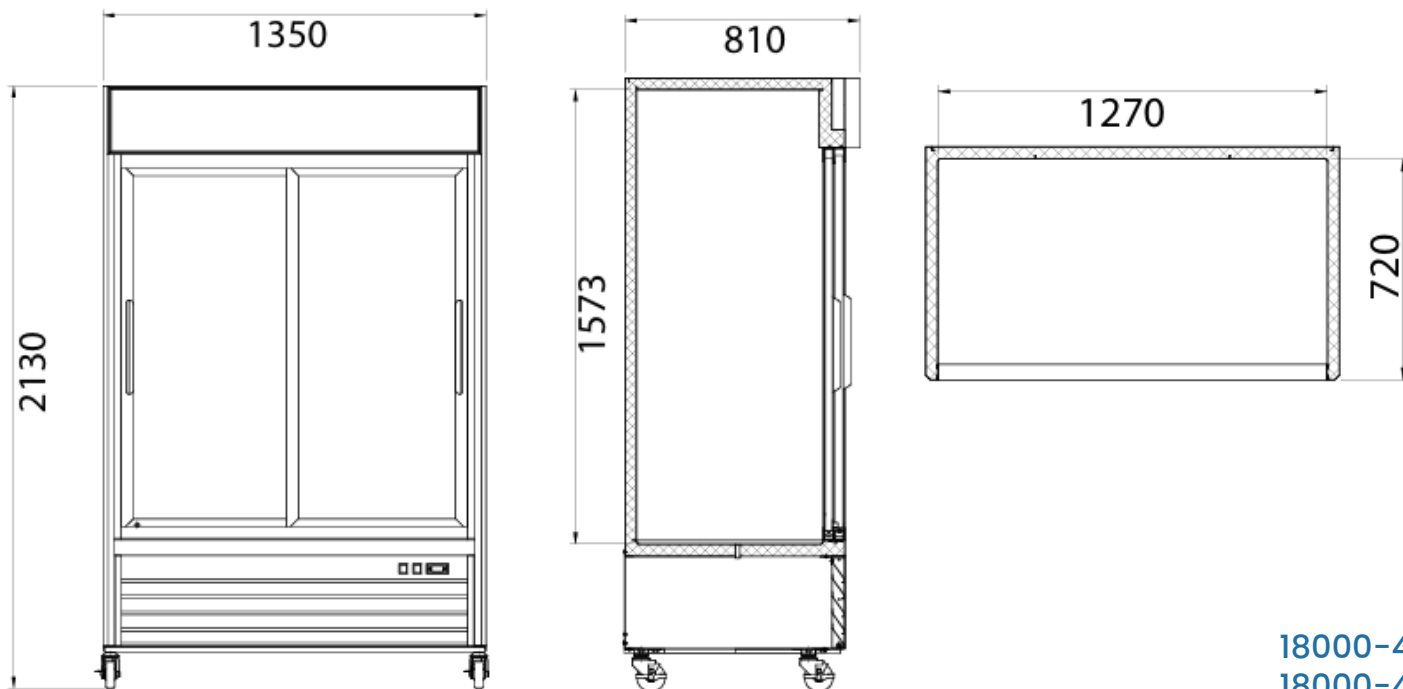


18000-487
18000-489

TECHNICAL DRAWING

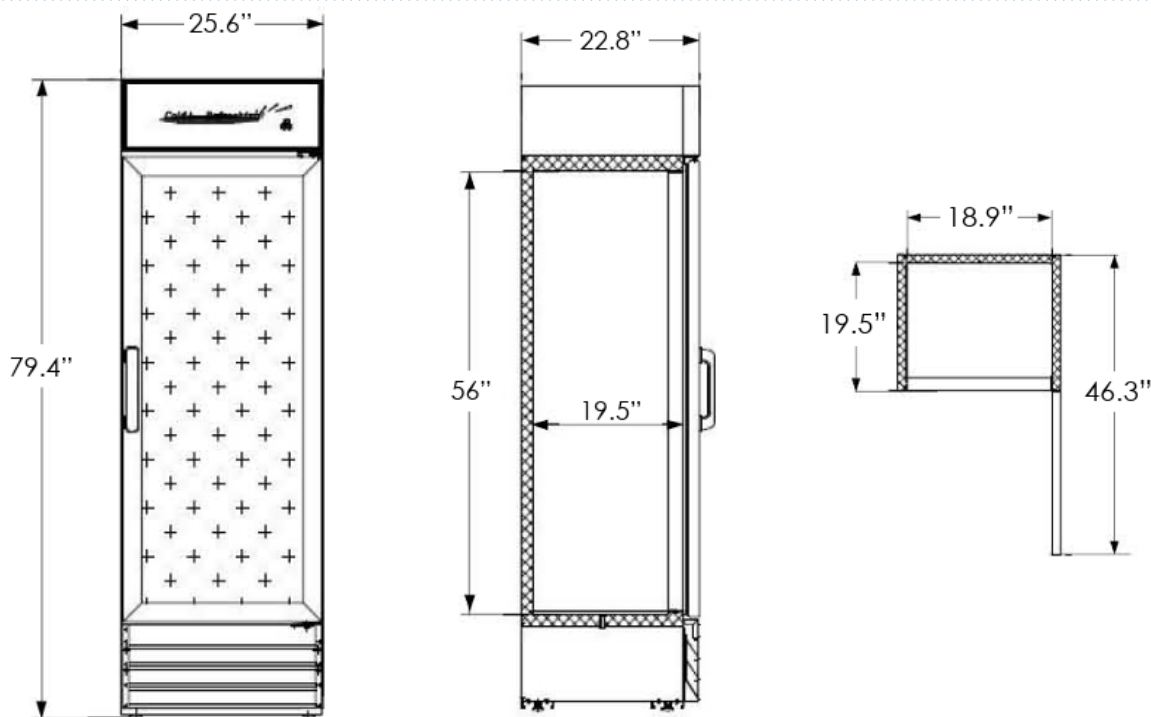


18000-491

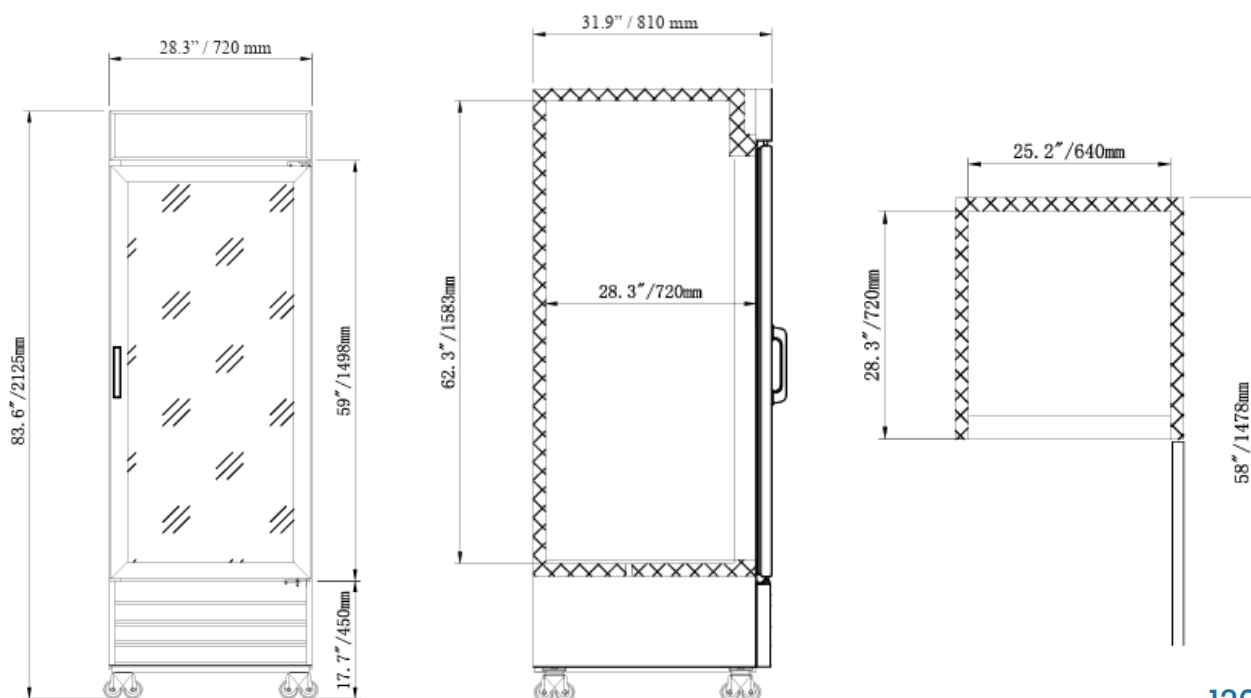

12000-128

TECHNICAL DRAWING

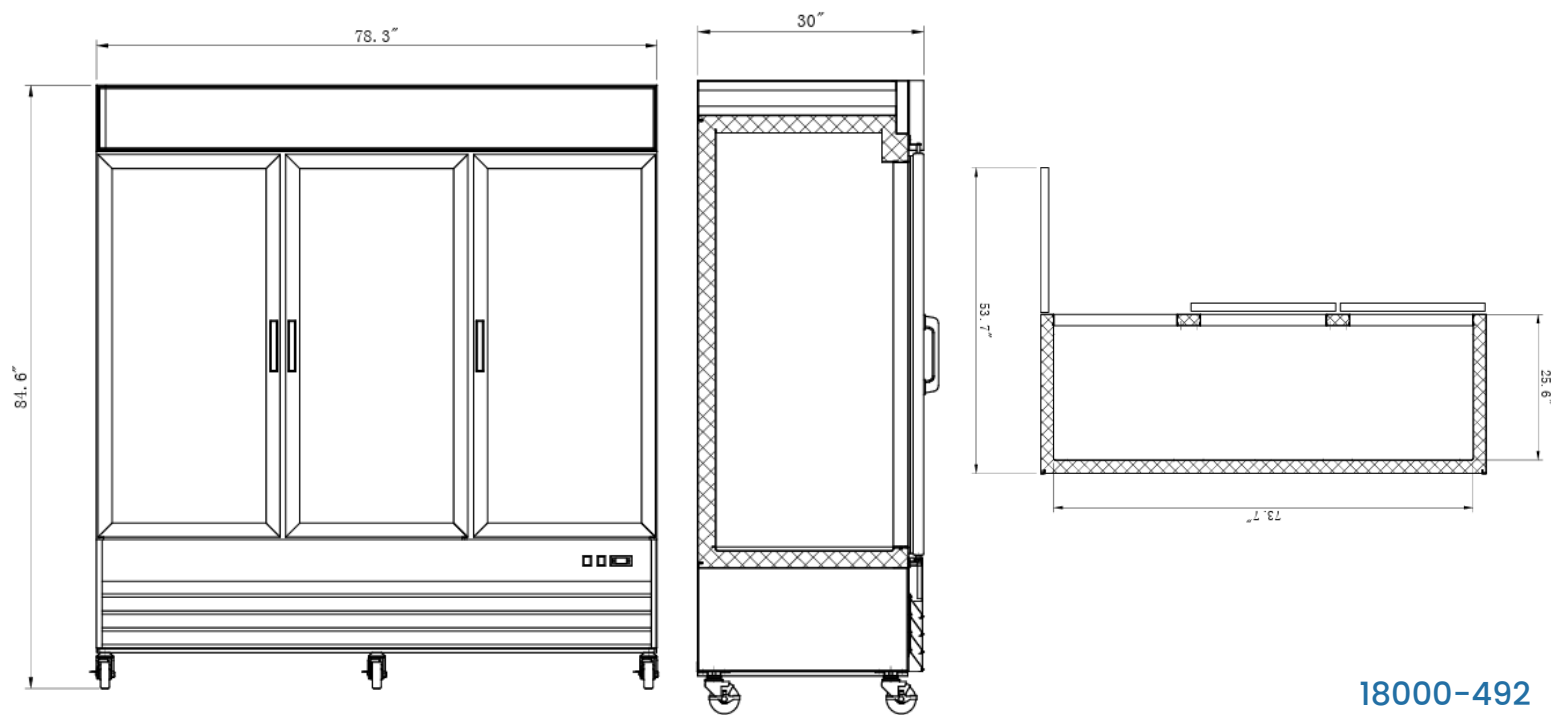

18000-492