

Stainless Steel Undercounter Refrigerator – 115V

SKU: 12000-801

70000-091

12000-187

70000-015

17000-844



Ensuring cold storage stays fresh, reliable, and conveniently accessible at all times.

This undercounter refrigerator delivers space-saving, dependable cold storage that fits neatly beneath counters or worktables, keeping ingredients easily accessible while optimizing workspace. Constructed with durable stainless steel inside and out, it includes a digital temperature controller, ventilated cooling with automatic defrost, and eco-friendly R290 refrigerant for efficient performance. Designed for busy kitchens, it also features self-closing doors with 90° stay-open function, adjustable PVC-coated shelves, and locking casters for enhanced durability, flexibility, and ease of use.

- Durable stainless steel construction
- Maintains safe food temperatures
- Digital temperature controller
- Ventilated system
- Automatic defrost
- Adjustable PVC-coated shelves
- Eco-friendly R290
- Easy to clean interior
- Self-closing doors
- Casters with brakes for mobility

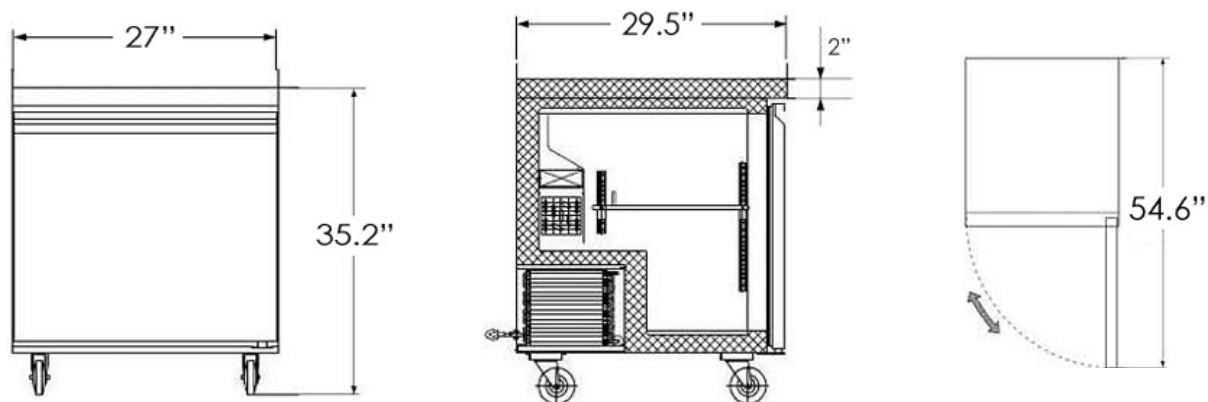
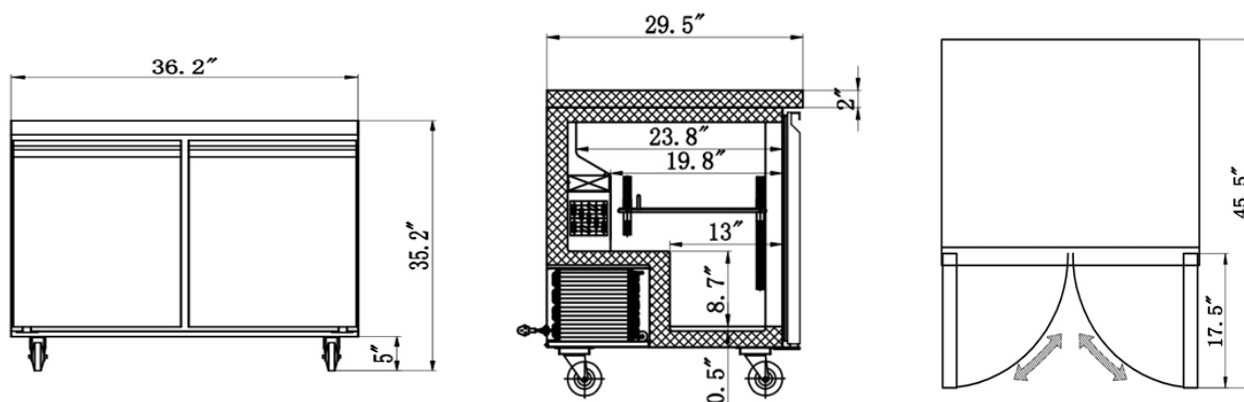
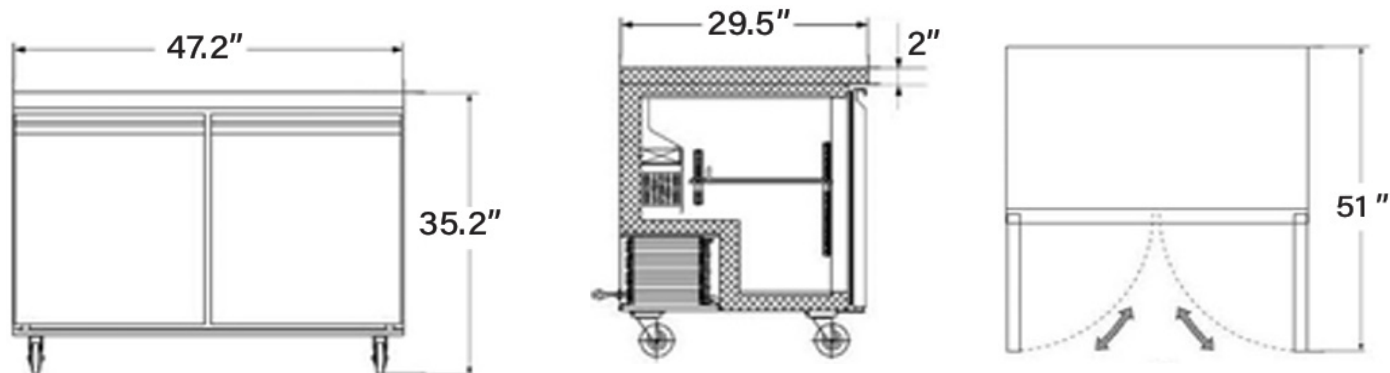
2 YEARS
WARRANTY
 PARTS & LABOUR
5 YEARS ONLY
 ON COMPRESSOR

NEMA
 5 - 15P
 125VAC / 15 AMP

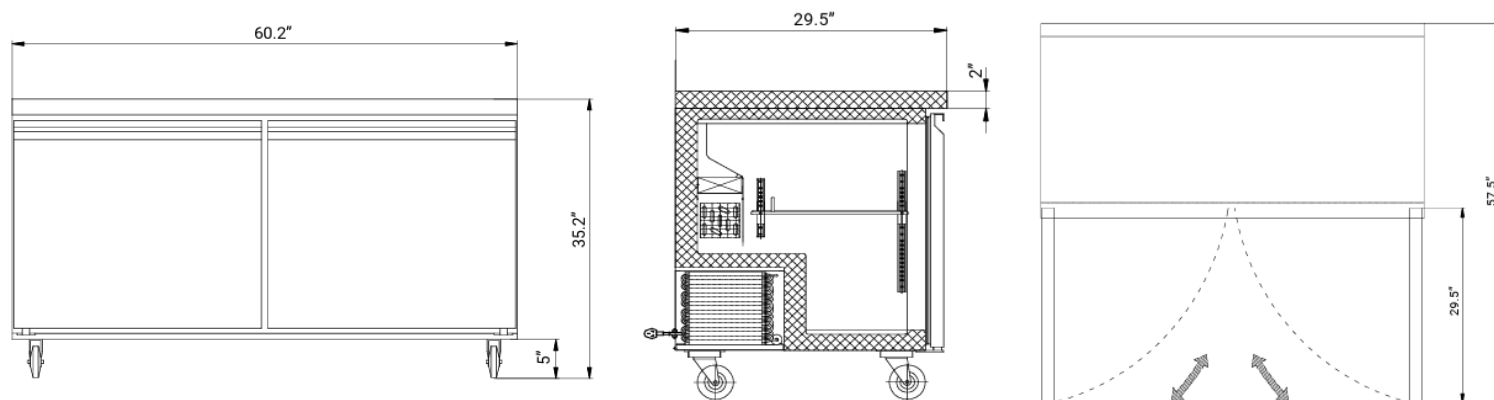


Made in China

Technical Specification					
SKU	12000-801	70000-091	12000-187	70000-015	17000-844
Features	27"	36"	47"	60"	72"
Capacity	177L 6.3 cu.ft.	246L 8.7 cu.ft.	338L 12 cu.ft.	425L 15 cu.ft.	440L 15.5 cu.ft.
Shelf Capacity	44 lb. 20 kg.	88 lb. 39.9 kg.	39.6 lb. 18 kg.	88 lb. 39.9 kg.	
Number of Shelves	1 Shelf	2 Shelves			3 Shelves
Shelf Material	Plastic Coated Steel				
Number of Doors	1 Self-Closing Door	2 Self-Closing Door			3 Self-Closing Door
Exterior Material	Stainless Steel				
Temperature Range	0.5°C - 5°C 33°F - 41°F				
Deforsting	Automatic				
Temperature Controller	Digital				
Cooling System	Ventilated				
Isolation Material	Cyclopentane				
Refrigerant	R290				
Electrical	115V / 60Hz / 1Ph				
Power	124W	250W	149W	324W	149W
Current	1.9A	2.3A	2.7A	3.12A	3.2A
Interior Dimensions (WDH)	22" x 22.8" x 23.5" 565 x 580 x 597 mm	33" x 19.8" x 23.5" 838 x 504 x 597 mm	42.5" x 22.8" x 23.5" 1080 x 580 x 597 mm	55.6" x 19.8" x 23.5" 1413 x 504 x 597 mm	66.9" x 19.8" x 23.5" 1698 x 504 x 597 mm
Net Dimensions (WDH)	27" x 29.5" x 35" 685 x 750 x 895 mm	36" x 29.5" x 35" 920 x 750 x 895 mm	47" x 29.5" x 35" 1200 x 750 x 895 mm	60" x 29.5" x 38.8" 1529 x 750 x 985 mm	72" x 29.5" x 35" 1829 x 750 x 895 mm
Net Weight	169 lb. 76.7 kg.	198 lb. 90 kg.	229 lb. 103.9	254 lb. 115 kg.	297.6 lb. 135 kg.
Gross Dimensions (WDH)	30" x 32.7" x 38.6" 770 x 830 x 980 mm	39" x 32" x 38" 990 x 820 x 970 mm	50.4" x 32.7" x 38.6" 1280 x 830 x 980 mm	63" x 32" x 38" 1600 x 820 x 970 mm	74" x 32" x 38" 1885 x 820 x 970 mm
Gross Weight	220 lb. 99.8 kg.	249 lb. 113 kg.	273 lb. 123.8 kg.	324 lb. 147 kg.	372.6 lb. 169 kg.
Plug Type	NEMA 5-15P				

TECHNICAL DRAWING: 12000-801 | 27"

TECHNICAL DRAWING: 70000-091 | 36"

TECHNICAL DRAWING: 12000-187 | 47"


TECHNICAL DRAWING: 70000-015 | 60"



TECHNICAL DRAWING: 17000-844 | 72"

