

## Grab-and-Go Open Refrigerated Floor Self-Serve Display

SKU: 70000-205

70000-206

70000-207




### High-Performance Open Refrigerated Floor Display Case


Keep your products fresh and visible with this versatile open refrigerated display case, perfect for cafes, restaurants, supermarkets, and convenience stores. Its open design offers customers easy access to merchandise, while the included night curtain reduces power consumption during non-operational hours.

Bright internal LED lighting enhances product visibility, complementing the sleek design. Adjustable shelves allow you to customize the display to suit your needs, and the digital temperature controls ensure precise cooling for optimal freshness. Ideal for showcasing dairy products, fruits, vegetables, and beverages, this display case is designed to maximize space and functionality.

Made in China

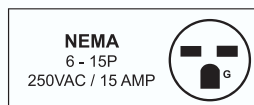

## TECHNICAL DRAWING

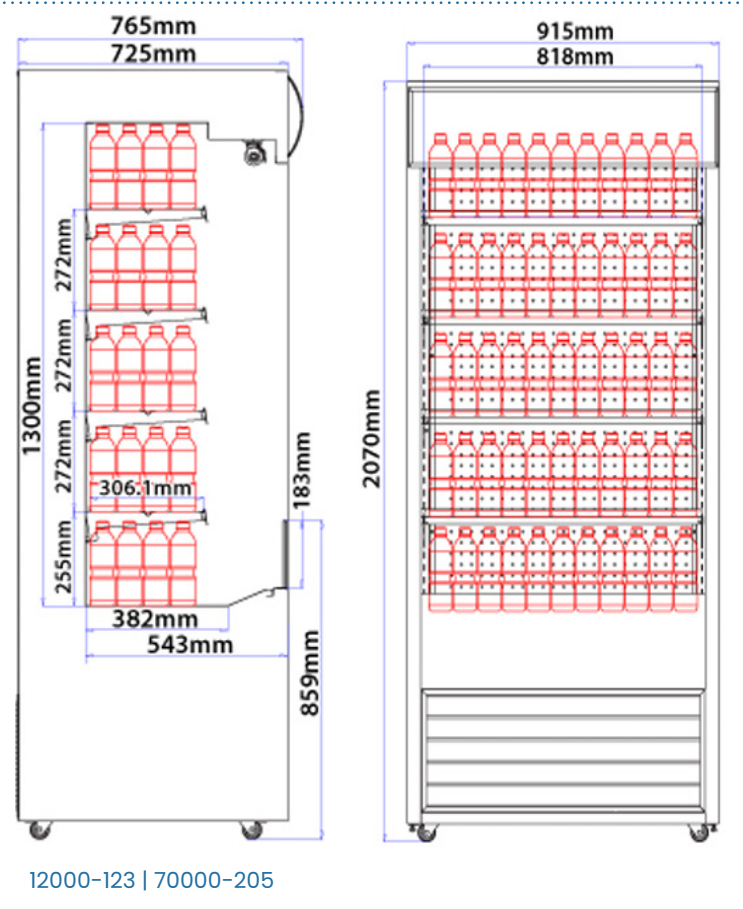

## TECHNICAL SPECIFICATION

SKU	70000-205
Capacity	530L   18.71 cu.ft.
Shelf Load Capacity	55.1 lb.   25 kg.
Number of Shelves	5
Number of Casters	4
Power	1700W
Amps	16A
Electrical	110V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	2°C - 10°C   35.6°F - 50°F
Refrigerant	R290
Type of Climate	3
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Net Dimensions (WDH)	36" x 30.1" x 81.5" 915 x 765 x 2070 mm
Net Weight	335.1 lb.   152 kg.
Gross Dimensions (WDH)	40" x 33.5" x 87.8" 1015 x 850 x 2230 mm
Gross Weight	388 lb.   176 kg.


*\*BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.*



NEMA  
6 - 15P  
250VAC / 15 AMP



## TECHNICAL DRAWING

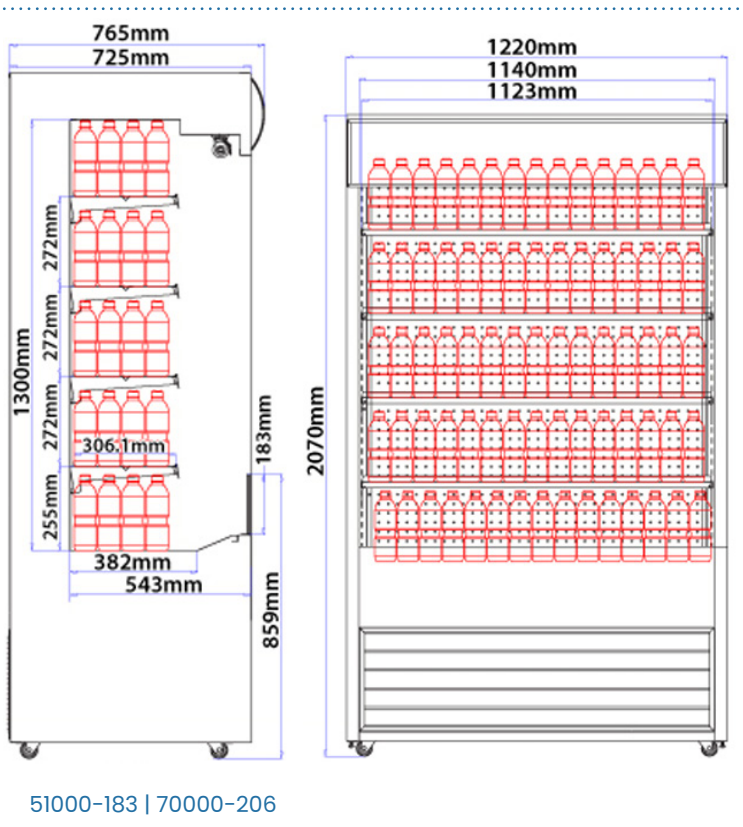

## TECHNICAL SPECIFICATION

SKU	70000-206
Capacity	700L   24.72 cu.ft.
Shelf Load Capacity	66.1 lb.   30 kg.
Number of Shelves	5
Number of Casters	4
Power	2550W
Amps	12.1A
Electrical	220V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	2°C - 10°C   35.6°F - 50°F
Refrigerant	R290
Type of Climate	3
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Net Dimensions (WDH)	48" x 30.1" x 81.5" 1220 x 765 x 2070 mm
Net Weight	426.6 lb.   193.5 kg.
Gross Dimensions (WDH)	52" x 33.5" x 87.8" 1320 x 850 x 2230 mm
Gross Weight	486.1 lb.   220.5 kg.


*\*BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.*



NEMA  
6 - 15P  
250VAC / 15 AMP



## TECHNICAL DRAWING

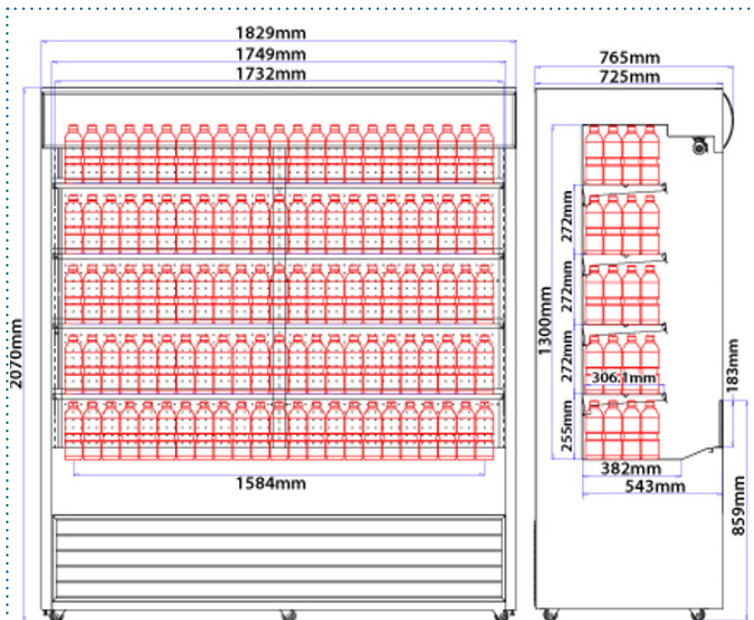

12000-124 | 70000-207

## TECHNICAL SPECIFICATION

SKU	70000-207
Capacity	1050L   37.08 cu.ft.
Shelf Load Capacity	110.2 lb.   50 kg.
Number of Shelves	5
Number of Casters	4
Power	2400W
Amps	11.5A
Electrical	220V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	2°C - 10°C   35.6°F - 50°F
Refrigerant	R290
Type of Climate	3
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Net Dimensions (WDH)	72" x 30.1" x 81.5" 1829 x 865 x 2070 mm
Net Weight	565.5 lb.   256.5 kg.
Gross Dimensions (WDH)	76" x 33.5" x 87.8" 1930 x 850 x 2230 mm
Gross Weight	652.6 lb.   296 kg.

*\*BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.*

