

Refrigerated Display Case, 4-Sided Glass

SKU: 15000-286

15000-287

15000-288

15000-289

15000-286 | 26" Wide / 59" Tall



15000-288 | 26" Wide / 75" Tall



15000-287 | 33" Wide / 59" Tall



15000-289 | 33" Wide / 75" Tall



Increase sales by presenting food in appealing, eye-catching displays.

Zanduco's four-sided glass refrigerated display case provides an affordable and efficient way to showcase your products. It features bright internal side LED lighting to enhance visibility, along with a durable stainless steel exterior for a clean, professional appearance.

The unit features adjustable chrome-plated shelves to accommodate a wide range of products, along with a digital temperature controller and display for precise cooling control. Its flat front glass door and four-sided double-glass design ensure excellent visibility from all angles. A ventilated cooling system promotes even air circulation, while the automatic defrost function makes maintenance easy and hassle-free.

FEATURES:

- Brilliant internal LED illumination
- Digital temperature controller & display
- Adjustable chrome plated shelves
- Four-sided double glass
- Front flat glass door
- Automatic defrost
- Ventilated cooling system
- Stainless steel

Made in China



NEMA
5 - 15P
125VAC / 15 AMP



2 YEARS
WARRANTY
PARTS & LABOUR

5 YEARS ONLY
ON COMPRESSOR




TECHNICAL SPECIFICATION

SKU	15000-286	15000-288	15000-287	15000-289
Features	26" Wide - 59" Tall	26" Wide - 75" Tall	33" Wide - 59" Tall	33" Wide - 75" Tall
Capacity	270L 9.53 cu.ft.	400L 14.13 cu.ft.	350L 12.36 cu.ft.	550L 19.42 cu.ft.
Number of Shelves	2	3	2	3
Shelf Dimensions	21.7" x 19.9" x 1.8" 550 x 505 x 48 mm	21.7" x 19.9" x 1.8" 550 x 505 x 48 mm	27.8" x 22" x 1.8" 705 x 559 x 48 mm	27.8" x 22" x 1.8" 705 x 559 x 48 mm
Lamp Power	10W	10W x 2	10W	10W x 2
Current	3.8A			
Power	361W			
Electrical	110V / 60Hz / 1Ph			
Temperature Range	2°C - 10°C 35.6°F - 50°F			
Refrigerant	4R290			
Injection	110g			
Blowing Gas	C5H10			
Interior Dimensions	21.9" x 21.1" x 32.5" 556 x 536 x 825 mm	21.9" x 21.1" x 47.9" 556 x 536 x 1217 mm	29.4" x 21.1" x 32.5" 747 x 536 x 825 mm	29.4" x 21.1" x 47.9" 747 x 539 x 1217 mm
Net Dimensions (WDH)	25.6" x 25.6" x 59" 650 x 650 x 1500 mm	25.6" x 25.6" x 75" 650 x 650 x 1908 mm	33.5" x 25.6" x 59" 850 x 650 x 1499 mm	33.5" x 25.6" x 75" 850 x 650 x 1908 mm
Net Weight	308.6 lb. 130 kg.	385.8 lb. 161 kg.	335 lb. 152 kg.	423.3 lb. 192 kg.
Gross Dimensions (WDH)	29" x 29" x 65" 737 x 737 x 1651 mm	29" x 29" x 81" 737 x 737 x 2057 mm	37" x 29" x 65" 940 x 737 x 1651 mm	37" x 29" x 81" 940 x 737 x 2057 mm
Gross Weight	324 lb. 147 kg.	408 lb. 185 kg.	370 lb. 168 kg.	463 lb. 210 kg.
Plug Type	NEMA 5-15P			


NEMA
5 - 15P
125VAC / 15 AMP




TECHNICAL DRAWING: 15000-286

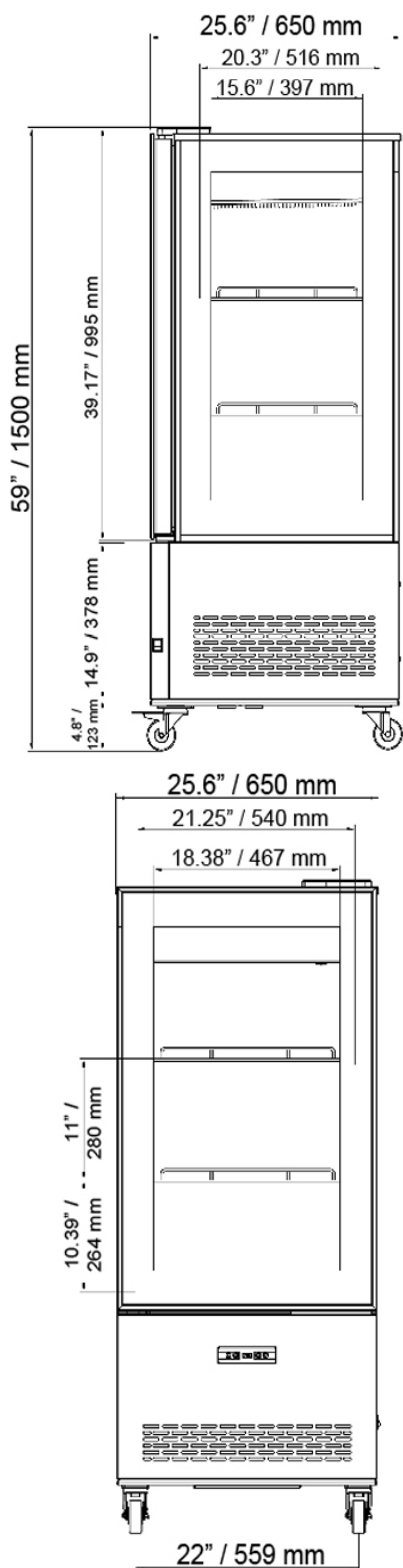

TECHNICAL DRAWING: 15000-288

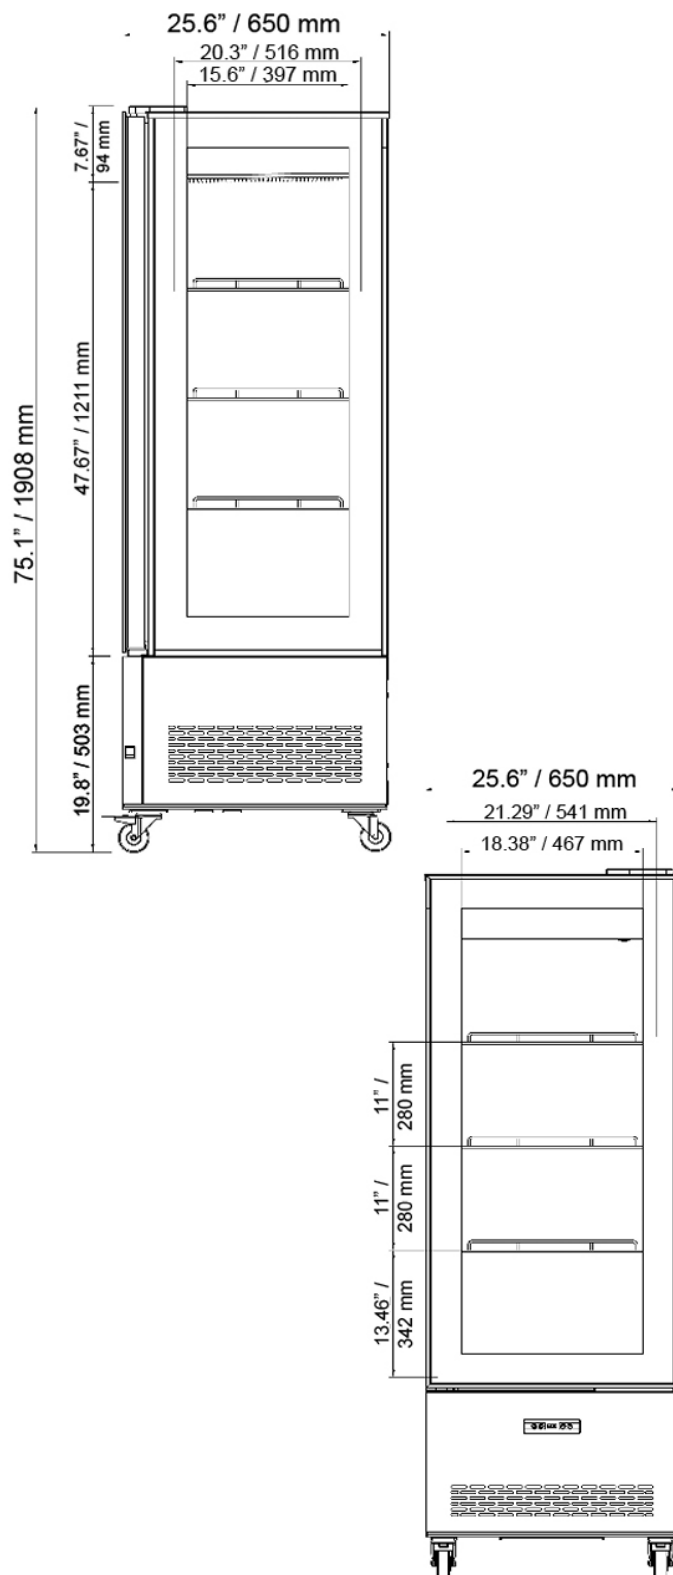

TECHNICAL DRAWING: 15000-287

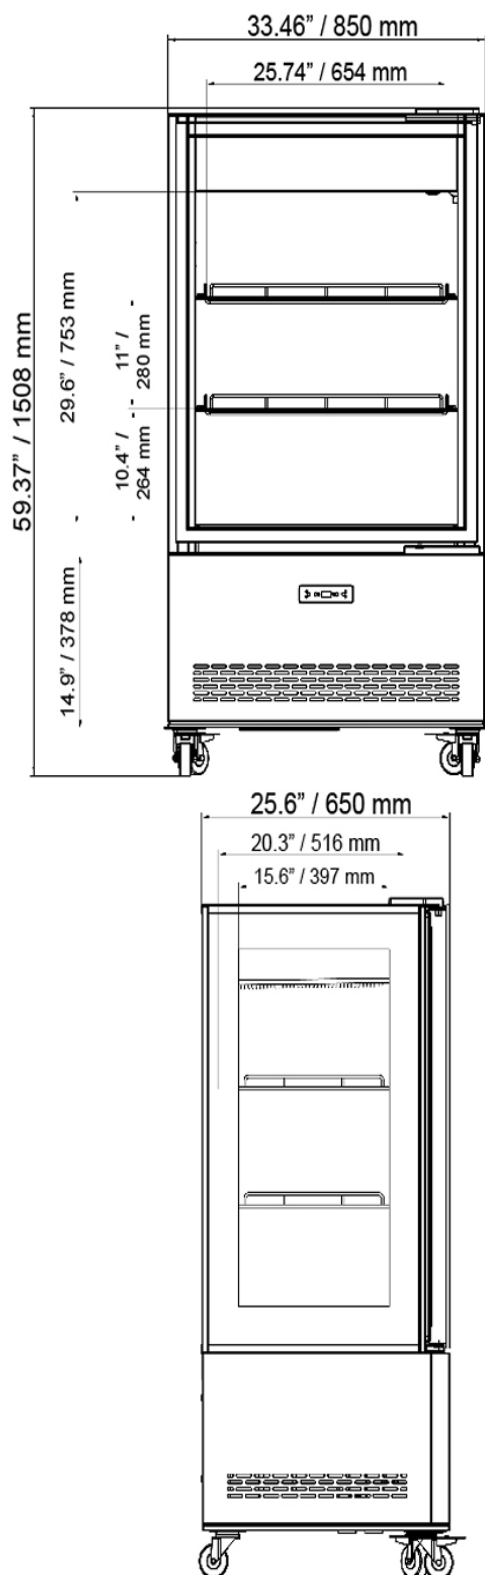

TECHNICAL DRAWING: 15000-289

